

Depolama / Storage

1. Ambalajında tutun; yağmur, kar, kir, doğrudan güneş ışığından ve diğer ısı kaynaklarından koruyun.

1. Keep strapped and protected from rain, snow, dirt and direct sunlight and other heat sources.



2. Yatay ve simetrik istiflenmiş şekilde depolayın (palet başına maksimum 55 ünite). Uygun havalandırma sağlayın.

2. Store horizontally and symmetrically stacked (maximum of 55 units per pallet). Ensure good ventilation.



3. Önerilen depolama koşulları:
- 20-35 santigrat derece
- %45 - %65 nem

3. Recommended storage conditions:
- 20-35 degrees Celsius
- 45% - 65% humidity



4. FIFO yöntemini kullanın (ilk giren ilk çıkar).

4. Use the FIFO method (first in - first out).




5. Plaka boyutları değişebildiğinden, hava durumuna bağlı olarak, montaj / işlem öncesinde 72 saat bekletilip ortama uyum sağlamaları gerekir.

5. As the plates can change dimension, depending on the weather, they must be acclimated 72 hours before mounting/processing.




6. EN 438'e göre kompakt laminat 6 mm dış cephe paneller için aşağıdaki toleranslar dikkate alınır:

Uzunluk/Genişlik	+ 10 mm/-0 mm
Kalınlık	+/- 0.4 mm
Düzlemsellik	5.0 mm/m
Gönyeden Sapma	1.5 mm/m

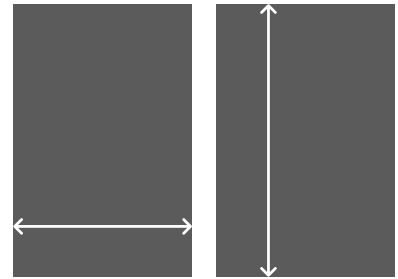

+10/-0

+10/-0

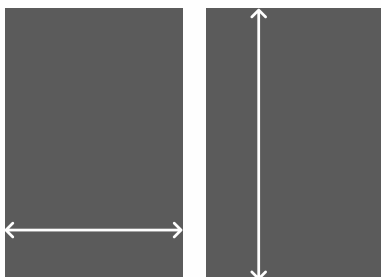

+10/-0

+10/-0

6. Please note the following tolerances for 6 mm facade panels of compact laminate according to the EN 438:

Length / width	+ 10mm / -0mm
Thickness	+/- 0.4mm
Curvature	5.0 mm / m
Right angle	1.5 mm / m